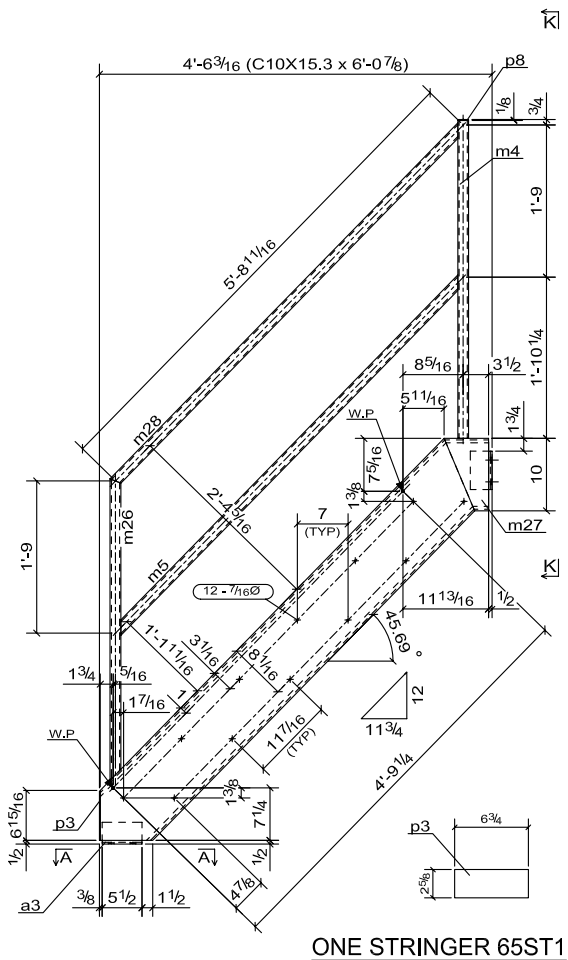

ONE STRINGER 65ST1

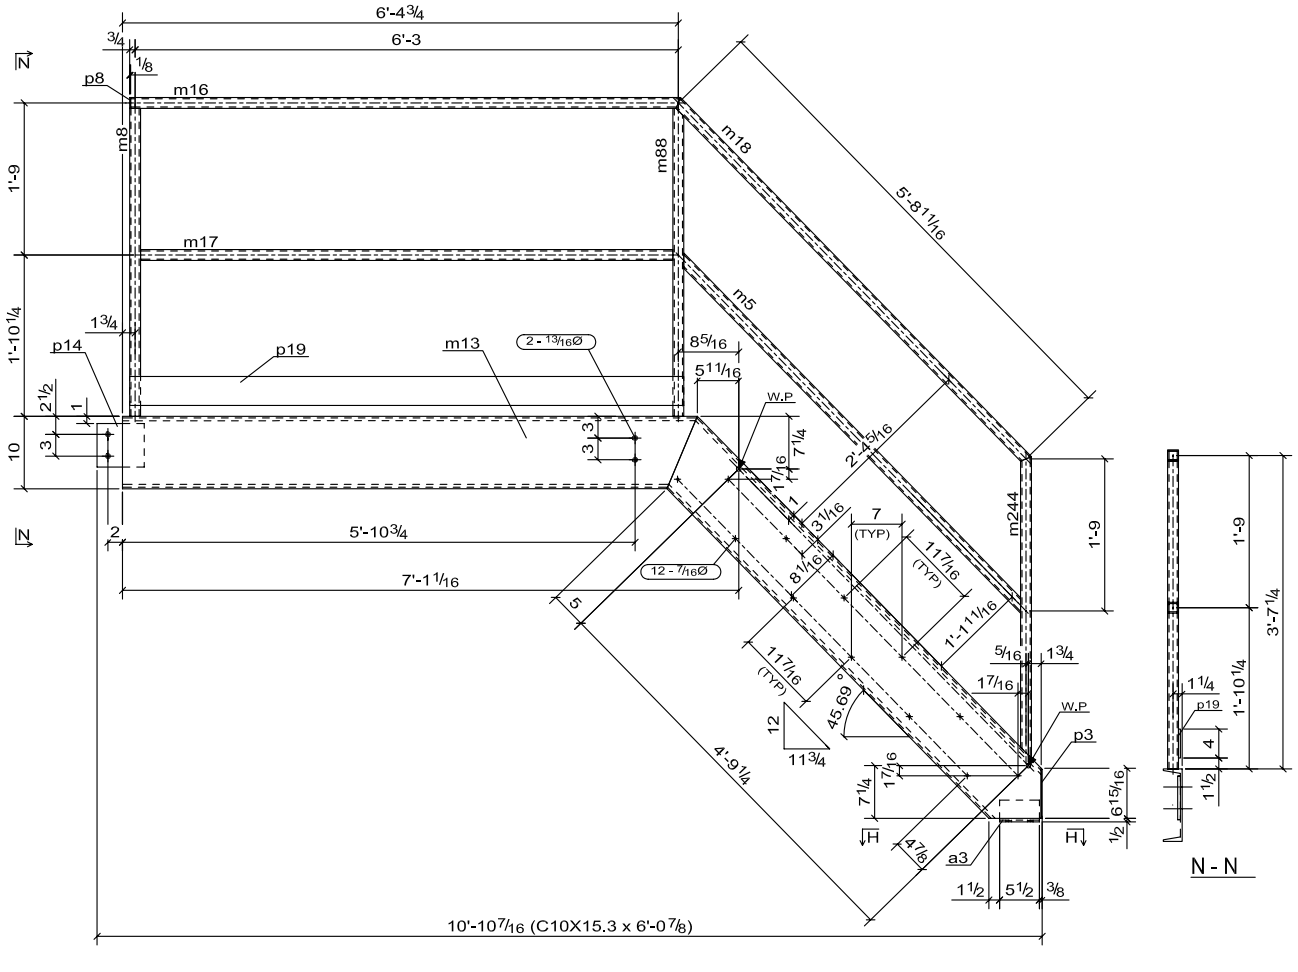

ONE STRINGER 65ST2

BILL OF MATERIALS								
NO PCS	DESCRIPTION	MARK	LENGTH	LENGTH DECIMAL	UNIT WEIGHT	WEIGHT	WEIGHT PER PIECE	REMARKS
1	C10X15.3	65ST1	6'-0 7/8"			93		
1	L3X3X1/4	a3	0'-5 1/2"			3		
1	L3X3X1/4	a12	0'-5 5/16"			3		
1	TS1-1/2X1-1/2X3/16	m4	3'-7 7/8"			11		
1	TS1-1/2X1-1/2X3/16	m5	5'-8 1/16"			17		
1	TS1-1/2X1-1/2X3/16	m26	3'-5 5/8"			10		
1	C10X15.3	m27	0'-2 1/8"			8		
1	TS1-1/2X1-1/2X3/16	m28	5'-8 11/16"			17		
1	PL1/8X2 5/8	p3	0'-6 3/4"			1		
1	PL1/8X1 1/2	p8	0'-1 1/2"			1		
1	C10X15.3	65ST2	6'-0 7/8"			93		
1	L3X3X1/4	a3	0'-5 1/2"			3		
1	TS1-1/2X1-1/2X3/16	m5	5'-8 1/16"			17		
1	TS1-1/2X1-1/2X3/16	m8	3'-6 1/2"			11		
1	C10X15.3	m13	6'-7 3/8"			102		
1	TS1-1/2X1-1/2X3/16	m16	6'-3 15/16"			19		
1	TS1-1/2X1-1/2X3/16	m17	6'-1 1/2"			18		
1	TS1-1/2X1-1/2X3/16	m18	5'-8 5/16"			17		
1	TS1-1/2X1-1/2X3/16	m25	3'-6 1/2"			11		
1	TS1-1/2X1-1/2X3/16	m26	3'-5 5/8"			10		
1	PL1/8X2 5/8	p3	0'-6 3/4"			1		
1	PL1/8X1 1/2	p8	0'-1 1/2"			1		
1	PL3/8X6	p14	0'-6 1/2"			5		
1	PL1/4X4	p19	0'-4 1/2"			22		
1	C10X15.3	65ST3	6'-0 7/8"			93		
1	L3X3X1/4	a3	0'-5 1/2"			3		
1	L3X3X1/4	a4	0'-5 5/16"			3		
1	C10X15.3	m2	0'-2 1/8"			8		
1	TS1-1/2X1-1/2X3/16	m5	5'-8 1/16"			17		
1	TS1-1/2X1-1/2X3/16	m11	3'-7 7/8"			11		
1	TS1-1/2X1-1/2X3/16	m26	3'-5 5/8"			10		
1	TS1-1/2X1-1/2X3/16	m28	5'-8 11/16"			17		
1	PL1/8X2 5/8	p3	0'-6 3/4"			1		
1	PL1/8X1 1/2	p8	0'-1 1/2"			1		
1	C10X15.3	65ST4	6'-0 7/8"			93		
1	L3X3X1/4	a3	0'-5 1/2"			3		
1	TS1-1/2X1-1/2X3/16	m5	5'-8 1/16"			17		
1	TS1-1/2X1-1/2X3/16	m8	3'-6 1/2"			11		
1	TS1-1/2X1-1/2X3/16	m18	5'-8 5/16"			17		
1	C10X15.3	m21	4'-3 5/8"			66		
1	TS1-1/2X1-1/2X3/16	m23	3'-8 3/4"			11		
1	TS1-1/2X1-1/2X3/16	m24	4'-0 3/16"			12		
1	TS1-1/2X1-1/2X3/16	m25	3'-6 1/2"			11		
1	TS1-1/2X1-1/2X3/16	m26	3'-5 5/8"			10		
1	PL1/8X2 5/8	p3	0'-6 3/4"			1		
1	PL1/8X1 1/2	p8	0'-1 1/2"			1		
1	PL1/4X4	p22	4'-0 3/4"			14		

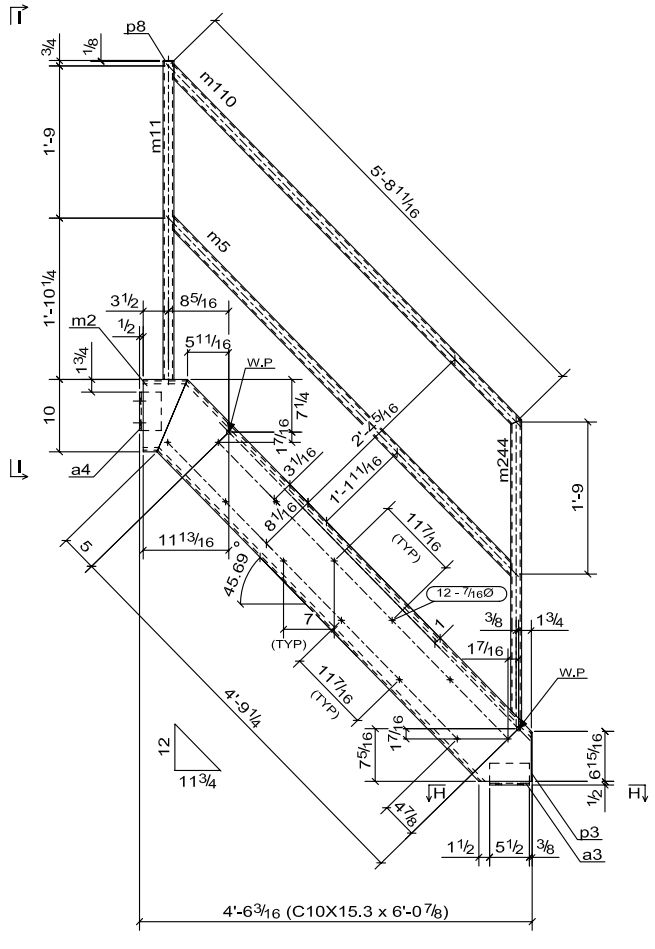

ONE STRINGER 65ST3

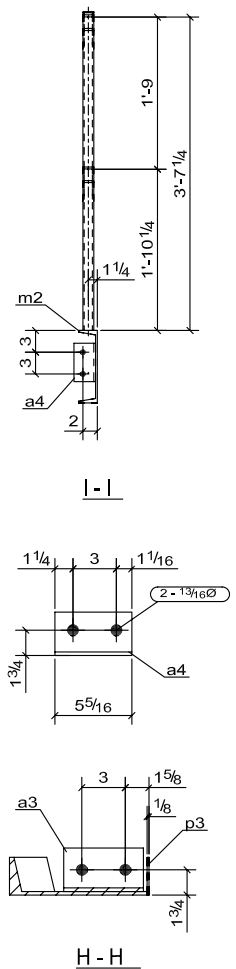

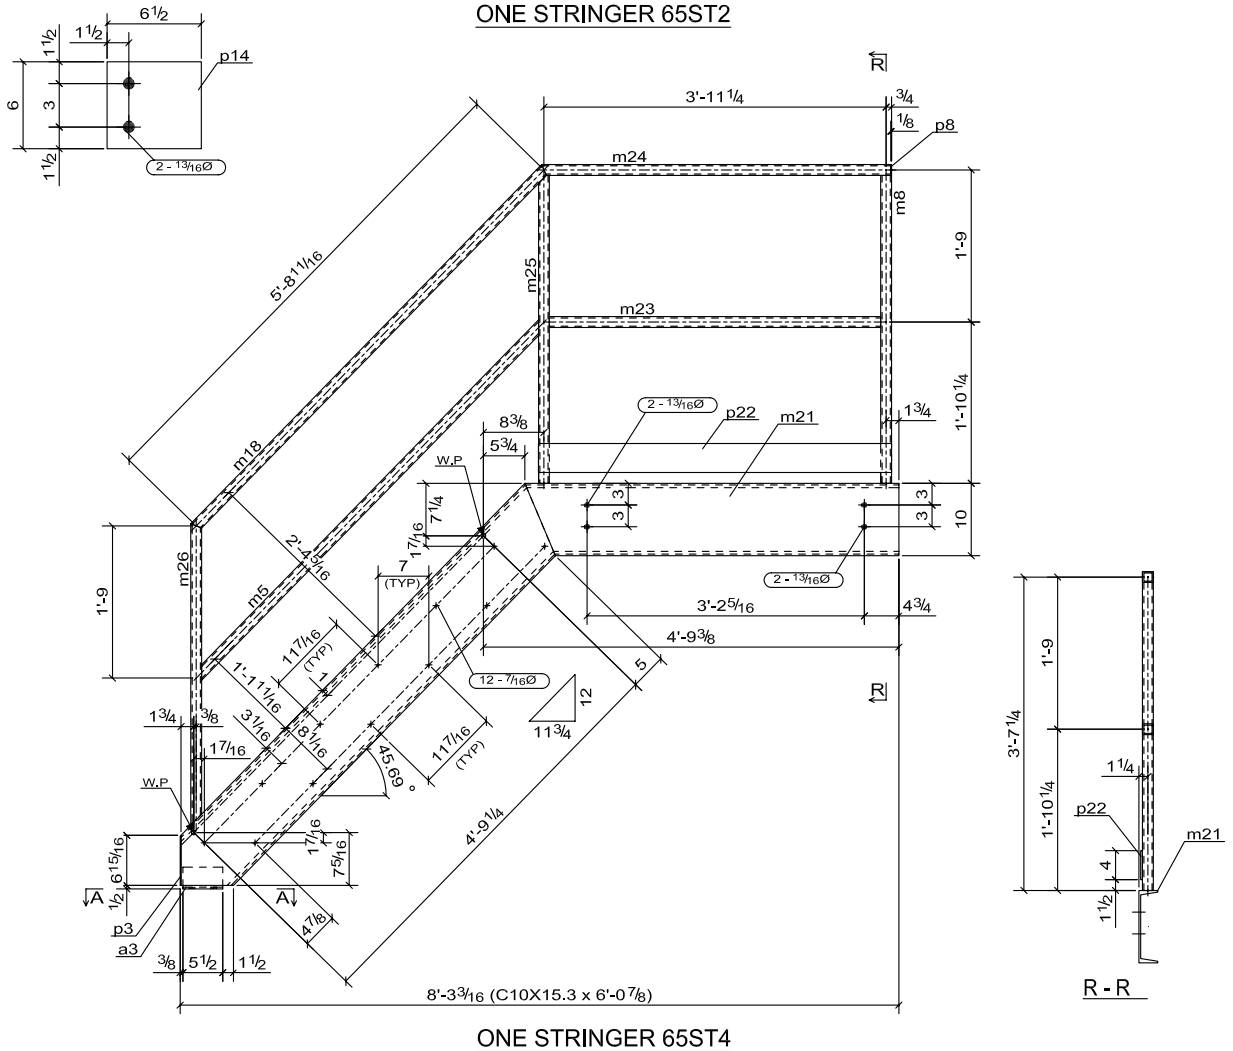

ONE STRINGER 65ST4

APPROVAL STAMPS:

COMMENTS:

FINISH NOTE:

CUST./ORDER NUMBER

PROJECT: Biodiesel Process Building

LOCATION:

ARCHITECT:

CONTRACTOR:

REFERENCE: E8

DRAWN DATE 05/25/2006

RRF JOB NO. R6-055

RRF SH. NO. 65

DESIGN CHECK

QUANTITY

ISSUED FOR: TENDER APPROVAL WORKSHOP FABRICATION JOB ISSUE